

# Maintenance Guide - STARPAK 1700

(refer over for operation)

FACTS YOU NEED TO KNOW - STARPAK 1700™-Patent Pending ser.60/633,676

**“O” Ring Seal:** To ensure an airtight, watertight seal, it is important that the “O” ring groove in the bottom and lid side edge of the 1200 case be checked on a regular basis for foreign debris such as sand, twigs, paper etc. The ‘O’ ring itself must be free of cuts, abrasions and foreign objects to ensure a proper seal.

*Check that contents such as loose cables and contents do not foul the seal.*

**Pressure Purge:** The pressure purge valve under the carry handle must be kept snug tight. All Pelican cases are designed to purge internal pressure buildup automatically. If you have a manual valve model, and are unable to open the case after air travel or returning from high elevations, simply loosen the screw valve one or two turns. You may hear a hiss of air. After 20 seconds, close purge snugly and open case.

**Cleaning the unit:** Most scuffs and stains can be removed quickly with a household cleaner and soft sponge. Do not use any type of brush that will scratch the surface. An occasional application of Armor All® or similar protectant will keep your **STARPAK** case looking as good as new.

**Storage:** Do not store any STARPAK case in the car trunk or enclosed areas during warm, sunny months in which elevated temperatures may occur. Do not place or store in close proximity to any type of heater, light or high heat producing machine or appliance. To do so voids warranty and can cause severe damage to the case and its sensitive and valuable contents.

## Care and use of the Hydro sorbent Desiccant Unit

**Use of Silica Gel:** The Hydro sorbent Compact Unit contains 1.4oz(40gm) of active silica gel, sufficient crystals to protect 3cu.ft(0.85cu.m) of enclosed space. The aluminium canister fits neatly into the **STARPAK** case. The silica gel remains dry to touch even when saturated.



**When, How to Reactivate Unit:** Note the small transparent “indicator” window on one side of the Hydro sorbent unit. When the crystals beneath are blue in colour, the unit is active. When they turn pink, reactivation is necessary as follows: Place unit in a vented 300deg.F (150deg.C) standard household type oven for 3 hours, or, until crystals turns blue again,


*Hydro sorbent can be reactivated indefinitely. It provides a lifetime of protection.*

# User Guide - STARPAK 1700 (GSP-1700 installed)


**FACTS YOU NEED TO KNOW - STARPAK 1700™-Patent Pending ser.60/633,676 (refer over for maintenance)**

## INSTALLING THE GSP-1700 TELEPHONE TO THE STARPAK 1700

1. Remove the Antenna connector cover sticker label from the back of telephone.
2. Remove rubber plug from the connector at base of the telephone. Rotate the rubber cover plug towards the antenna.
3. Insert the connector on the base of the Cradle into the connector on the telephone.
4. Lay phone down and slide in until it locks into place. You should hear a “click”.
5. To remove the phone, press the release button at the top of the Cradle, and gently slide the telephone out and upwards.
6. Replace the rubber plug in the base connector to protect from damage and entry of foreign objects.

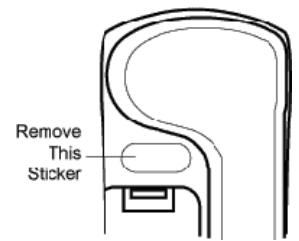

1. Insert plug into phone socket
2. Rotate phone into locked position.

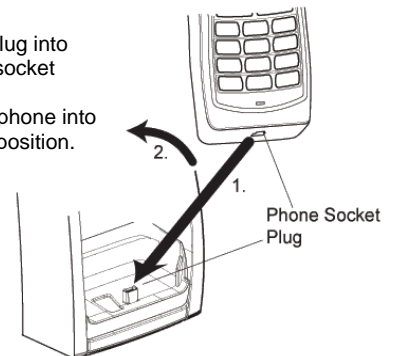

### Caution!

**Do not pull the phone out of the Cradle without first pressing the release button. If you do so, you could damage the phone and the Cradle interface mini USB connector**

## TURNING ON THE STARPAK and TELEPHONE

When you turn on the vehicle's ignition, both phone and kit are turned on. The phone is ready to make or receive a call.

## HANDS FREE and PRIVACY HEADSET SPEAKER and RINGER VOLUME

The dual purpose Volume key is located on the top left side of the telephone.

- RINGER: Adjust the ringer volume when the phone call is not engaged.
- SPEAKER: Adjust the phone speaker volume while call is in progress.

## Quick Trouble Shooting Guide

(Refer to GSP-1700 Telephone and/or GIK-1700 Vehicle Kit instruction manual for more detailed information)

### Kit will not power up:

Check if the 5 Amp fuse located in the screw end of the cigarette lighter has failed. Check also the cigarette lighter fuse located in the vehicles own fuse panel, or try your **STARPAK** in an alternate vehicle with a 12V supply outlet.

### Hands Free function not working:

Ensure the telephone is laying comfortably in the cradle and that it is completely snug with the retaining clip at the top firm. Completely remove the optional Privacy Headset(GHS-1700) if it is still plugged in.

### No Globalstar Service Signal:

CHECK THE ANTENNA DUST COVER HAS BEEN REMOVED OFF THE BACK OF THE TELEPHONE.  
Ensure that the telephone is locked down in place. Remove and reinstall telephone.

## Technical and Warranty Information

### Warranty

### Warranty

### Total Weight

### Power Supply

### Operating Temperature

### NON Operational Temp.

### Globalstar Antenna

**Starpak 1700 Components:** 24 months unconditional from date of purchase.

**Qualcomm/Globalstar Components:** Refer to your Warranty schedule.

Complete: **STARPAK 1700** with GSP-1700 Telephone installed: 5.5lb (2.5kg)

Range: +12.0V DC Nominal Input Voltage

-30 to +50C (-22 to +122F)

-40 and above 85C(-40 to 185F)

Speed Rating: 100mph (160kph) normal road conditions, mounted on clean metal surface.

STARPAK 1700™ patent pending ser.60/633,676  
Pacific Rim U.S.A.,Inc. www.pacificrimusa.net